



DUALCO AIR/HYDRAULIC INJECTION GUN

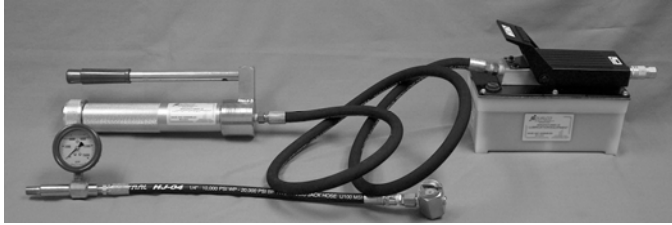

Model 11140

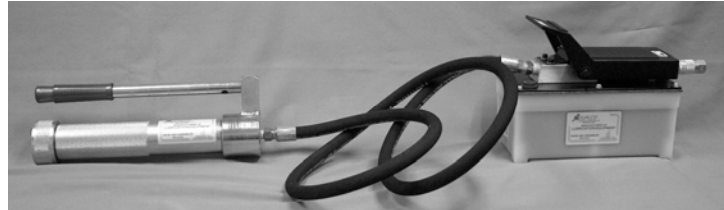

Model 11130

The **DUALCO AIR/HYDRAULIC INJECTION GUN** is needed for high pressure applications. Benefits include operating ease, smooth efficiency, and a quick discharge rate. This gun is rugged, long lasting, precision manufactured and is recommended for services such as steam, hot oil, hot compressed gas, and on or offshore platforms. It is designed to pump standard and special materials including highly viscous lubricants, sealants, packing, and cleaners. This gun is adaptable for injecting liquids. They are also used for hydrostatic and applied testing on pipelines and well heads. Both models are rated to 10,000 psi.

VARIOUS BARREL CAPACITIES UP TO 20 OUNCES ARE AVAILABLE

INQUIRE REGARDING OTHER AVAILABLE MODELS INCLUDING HOSE ASSEMBLY OPTIONS

IN-LINE AIR FILTERS, REGULATORS, DRYERS, AND LUBRICATORS ARE AVAILABLE

USES FOR THE DUALCO AIR/HYDRAULIC INJECTION GUN INCLUDE

INJECTING MATERIALS INTO PUMPS AND VALVES WHEN A FAST CONTROLLED DISCHARGE RATE IS ADVANTAGEOUS

WORKING IN EXTREME TEMPERATURE AND HARSH ENVIRONMENTS

COMMON INDUSTRY APPLICATIONS

PIPELINES CONVEYING CHEMICALS, CRUDE OR REFINED OIL, NATURAL GAS, LPG, HYDROCARBONS & OTHER FUELS

PUMPING & COMPRESSOR STATIONS, REFINERIES & CHEMICAL PLANTS

STEEL MILLS ... LUMBER & PAPER MILLS

GAS & OIL DRILLING / PRODUCTION FIELDS

ASPHALT, RUBBER, WATER & SEWAGE TREATMENT PLANTS

HEAVY EQUIPMENT AND MANUFACTURING

MINING & MARINE, INDUSTRIAL & MUNICIPAL UTILITIES

FEATURES

- TAMPER PROOF INTERNAL RELIEF VALVE
- DETACHABLE HANDLE WITH 1 oz. CALIBRATIONS, ALSO USED AS A PUSH ROD TO RETURN BARREL PISTON AND TO LOCK & UNLOCK BARREL CAP
- SUPERIOR PUMPING PERFORMANCE WITH LUBRICANTS, SEALANTS, PACKING & CLEANERS
- EASILY REFILLED WITH STICKS OR BULK
- IDEAL FOR LONG PRODUCTION WITH LESS EFFORT THAN CONVENTIONAL GUNS
- HEAVY DUTY CONSTRUCTION
- "SURE-GRIP" SURFACES
- EASILY SERVICEABLE AND PARTS ARE AVAILABLE

OPERATE WITH CAUTION AND SAFETY

SPECIFICATIONS: NET WEIGHT #11140 26-1/2 lbs., #11130 24-1/2 lbs. • BOX DIMENSIONS 24" x 12" x 12" • CAPACITY ONE "J" SIZE STICK, 9-1/2 oz. or 17 cu. in. • AIR INLET 1/4" NPT(f) • OUTLET 1/4" NPT(f) (Other outlet sizes available) • OPERATES at 80 to 120 psi AIR SUPPLY FROM PLANT, TANK or PORTABLE SOURCE • AIR CONSUMPTION 9 CFM to 20 CFM • DELIVERY 59 cu. in./min. to 4 cu. in./min. • STANDARD FLUID SUPPLY HOSE is 6 feet lg. • SELF PRIMING HYDRAULIC PUMP

THESE PRODUCTS ARE REPAIRABLE AND RECYCLABLE

MADE AND ASSEMBLED IN U.S.A.